
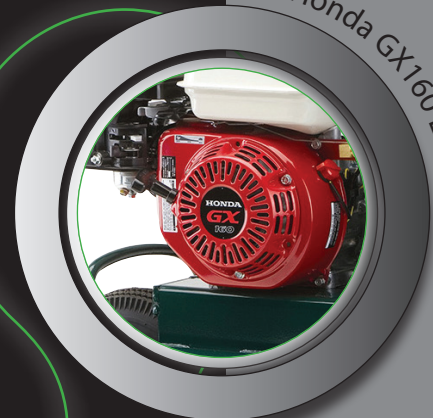


ROLAIR®

S Y S T E M S

OUR FOCUS IS COMPRESSORS

4090HK17 HONDA GX160 ENGINE

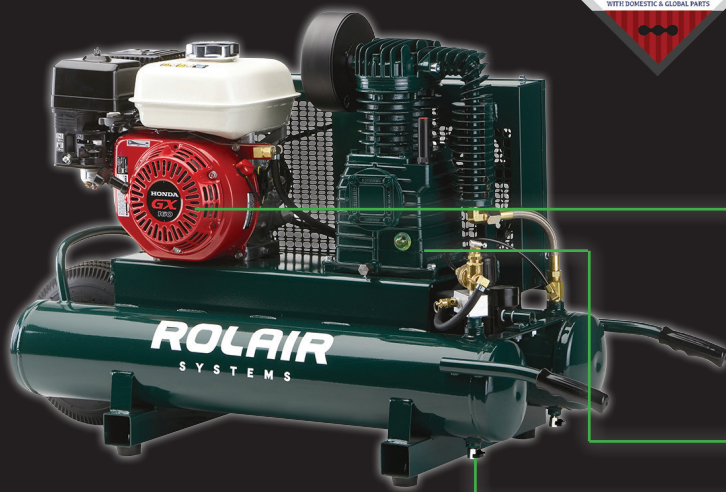

Honda GX160 Engine



34 oz. Crankcase Prefilled with Oil



Ball Valve Tank Drains

SPECIFICATIONS

ENGINE DISPLACEMENT	163 cc
ENGINE RPM	3000-2150
CFM DELIVERED @ 90 PSI	9.3 CFM
CFM DISPLACED	13.1 CFM
TANK CAPACITY	9 GALLONS
FACTORY SETTINGS	105-135 PSI
PUMP-UP / RECOVERY TIME	1:04 / :15
SHIPPING WEIGHT	180 LB
DIMENSIONS (LxWxH)	46"x19"x28"
PUMP OIL CAPACITY	34 OZ
PUMP STAGES	1

EQUIPMENT

STANDARD

- FOAM-FILLED, FLAT-FREE TIRE
- TOTALLY ENCLOSED STEEL BELT GUARD
- AUTOMATIC ENGINE IDLE CONTROL
- SCHMIDT BELT-TIGHTENING DEVICE
- COLD START VALVE

OPTIONAL

- IN-LINE FILTER
- REGULATOR
- LUBRICATOR